



MODEL: BA-2AL

二片式法蘭口球塞閥 150LB

Two-Piece Flange Ends Full Port Ball Valve ANSI CLASS 150

FEATURES :

1. INVESTMENT CASTING
2. FLOATING BALL
3. WALL THICKNESS : ASME B16.34
4. FLANGE DIMENSION : ASME B16.5 CLASS 150
5. FACE TO FACE : ASME B16.10
6. ACTUATOR MOUNTING PAD

Part's Material :


NO	PART'S NAME	MATERIAL		
1	BODY	A351-CF8	A351-CF8M	A216-WCB
2	CAP	A351-CF8	A351-CF8M	A216-WCB
3	BALL	A351-CF8	A351-CF8M	A351-CF8
4	STEM	A351-CF8	A351-CF8M	A216-WCB
5	BALL SEAT	PTFE		
6	JOINT BOLT	SS 304		
7	JOINT GASKET	PTFE		
8	THRUST WASHER	PTFE		
9	STEM PACKING	PTFE		
10	GLAND	A351-CF8		
11	STOP PLATE	AISI 304		
12	HANDLE	FCD45		
13	SNAP RING	STEEL		
14	JOINT BOLT	SS 304		

TEST PRESSURE :

UNIT : PSI

TYPE	PRESSURE
SHELL TEST (WATER)	450
SEAT TEST (WATER)	325
SEAT TEST (AIR)	85

RESSURE TEMPERATURE RATING :

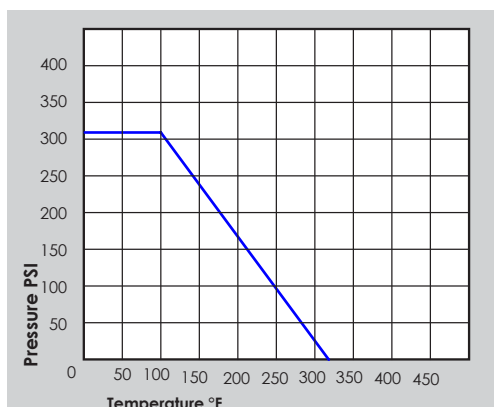

UNIT : MM

DIMENSIONS:

SIZE	15(1/2")	20(3/4")	25(1")	32(1-1/4")	40(1-1/2")	50(2")	65(2-1/2")	80(3")	100(4")	125(5")	150(6")	200(8")
A	15	20	25	32	38	50	65	80	100	124	149	198
B	60	70	80	90	98.5	120.7	139.7	152.4	190.5	216	241.3	298.5
C	89	98	108	117	127	152	177	190	229	254	279	343
D	108	117	127	140	165	178	190	203	229	356	394	457
E	81	82	95	100	108	118	149	162	168	218	295	355
F	130		160		235		404		466		565	
G	41		50		63		75		75		98	
H	1/4-20UNC		5/16-18UNC		3/8-16UNC		7/16-14UNC		1/2-12UNC		1/2-12UNC	
I	10		12		17		20		27		32	
PCD	42		50		70		102		125		125	
M	M5*0.8		M6*1.0		M8*1.25		M10*1.5		M12*1.75		M12*1.75	
d	15		15		15		19		19		23	
N	4		4		4		8		8		8	