



MODEL: BT-2MM


Two-Piece Full Port Screwed Ends Ball Valve 2000PSI SEAL WELDED



FEATURES:

1. INVESTMENT CASTING BODY
2. FLOATING BALL
3. 2000 PSI W.O.G 1/4"~ 2".
4. THREADS CONFORM TO ANSI B1.20.1, BS21, DIN259/2999
5. LOCKING LEVER HANDLE



PRESSURE TEMPERATURE RATING :

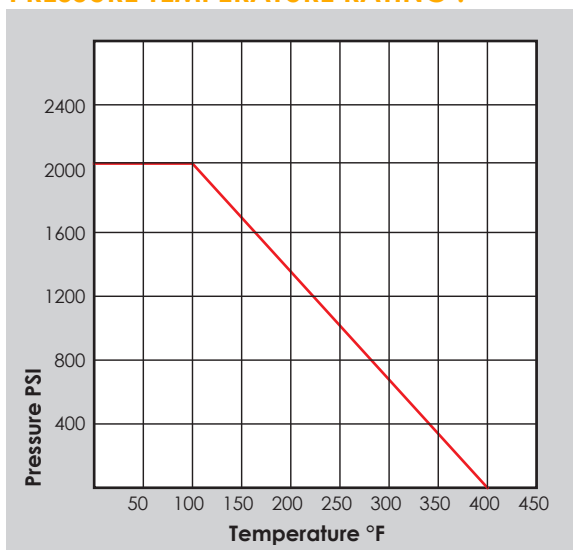

TESS PRESSURE:

UNIT : PSI

TYPE	BT-2MM
SHELL TEST (WATER)	3000
SEAT TEST (WATER)	2200
SEAT TEST (AIR)	85

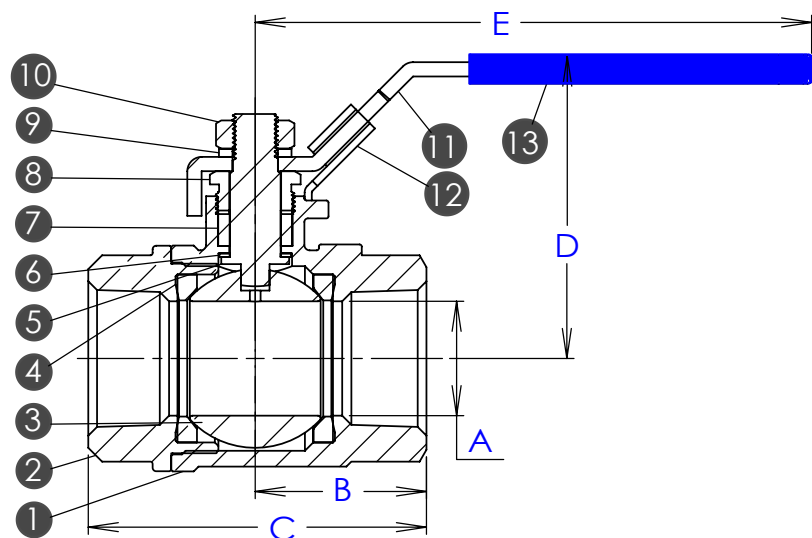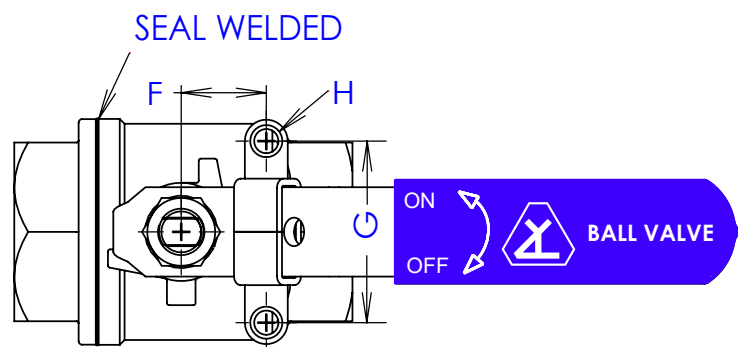

Part's Material :

NO		MATERIAL
1	BODY	CF8M / WCB
2	CAP	CF8M / WCB
3	BALL	CF8M / CF8
4	BALL SEAT	R-PTFE
5	STEM	AISI 316
6	THRUST WASHER	R-PTFE
7	STEM PACKING	R-PTFE
8	GLAND NUT	AISI 304
9	SPRING WASHER	AISI 304
10	STEM NUT	AISI 304
11	HANDLE	AISI 304
12	LOCKING DEVICE	AISI 304
13	HANDLE COVER	PLASTIC

DIMENSIONS:

UNIT : mm

SIZE	A	B	C	D	E	F	G	H	WEIGHT
1/4"	9.6	27.1	56.8	54	100	12.7	28.5	M6*1.0	0.28 KGS
3/8"	9.6	27.1	56.8	54	100	12.7	28.5	M6*1.0	0.26 KGS
1/2"	12.7	30.1	61.4	57	100	12.7	28.5	M6*1.0	0.32 KGS
3/4"	20	35.7	72.5	64	122	22.1	34.8	M6*1.0	0.75 KGS
1"	25	43.7	86.4	68	122	22.1	34.8	M6*1.0	0.85 KGS
1-1/4"	32	47.5	94	86	156	23.6	50.8	M8*1.25	1.36 KGS
1-1/2"	38	57.6	116	92	156	23.6	54	M8*1.25	2.06 KGS
2"	50.8	67.5	134	105	183	23.6	60.3	M8*1.25	3.80 KGS