



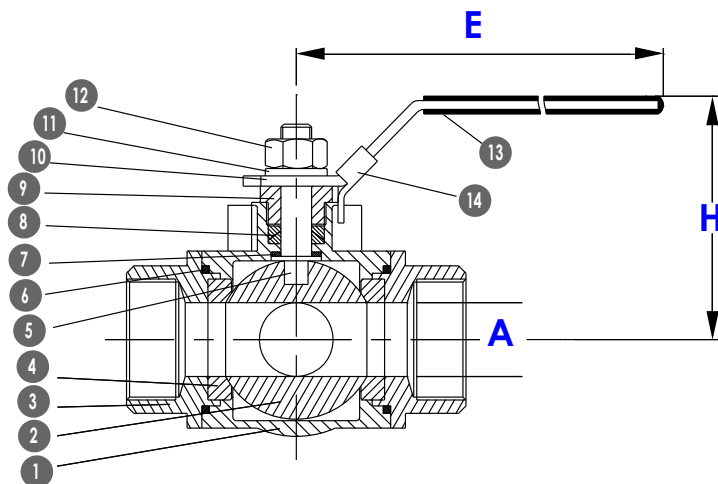

MODEL: BT-L(T)A 三通牙口 無平台 1000PSI

Three-Way Reduce Port Screwed Ends 3-Way Ball Valve 1000PSI

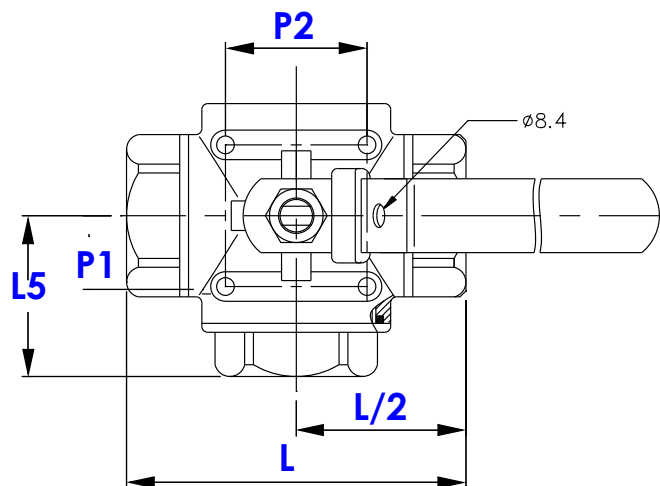

PORT \ TURN	0°	90°	180°	270°
	T	L	T	L
T				
L				

DIMENSION :

UNIT : MM

SIZE	A	E	H	L	L/5	M	P1	P2
1/4"	11	106	61	69.4	35	10-24UNC	13	28.5
3/8"	11	106	61	69.4	35	10-24UNC	13	28.5
1/2"	12.7	138	65	76	37.5	10-24UNC	13	28.5
3/4"	16	138	71	86.6	45	10-24UNC	21	34.6
1"	20	157	76	102	51	10-24UNC	21	34.6
1-1/4"	25	157	81.5	118	58	10-24UNC	24	38.0
1-1/2"	32	220	102	126	63	1/4-20UNC	24	38.0
2"	38.1	220	112.2	149	77	1/4-20UNC	24	38.0

FEATURES :

1. BODY AND END CAPS QUALITY INVESTMENT CASTING
2. ADJUSTABLE STEM PACKING
3. BLOW-OUT-PROOF STEM DESIGN
4. AVAILABLE IN CARBON OR STAINLESS STEEL BODY
5. FLOATING BALL
6. LOCKING LEVER HANDLE AVAILABLE
7. THREADS CONFORM TO ANSI B1.20.1, BS21, DIN259, DIN2999
8. L OR T PORT

MATERIAL LIST :

No.	PART'S NAME	MATERIAL
1	BODY	A351-CF8M
2	BALL	A351-CF8M
3	CAP	A351-CF8M
4	BALL SEAT	PTFE
5	STEM	A276-316
6	BODY SEAL	PTFE
7	THRUST WASHER	PTFE
8	STEM PACKING	PTFE
9	GLAND NUT	AISI 304
10	HANDLE	AISI 304
11	SPRING WASHER	AISI 304
12	HANDLE NUT	AISI 304
13	HANDLE COVER	PLASTIC
14	LOCKING DEVICE	AISI 304

TEST PRESSURE :

UNIT : PSI

TYPE	PRESSURE
SHELL TEST (WATER)	1500
SEAT TEST (WATER)	1100
SEAT TEST (AIR)	85

PRESSURE TEMPERATURE RATING :

