

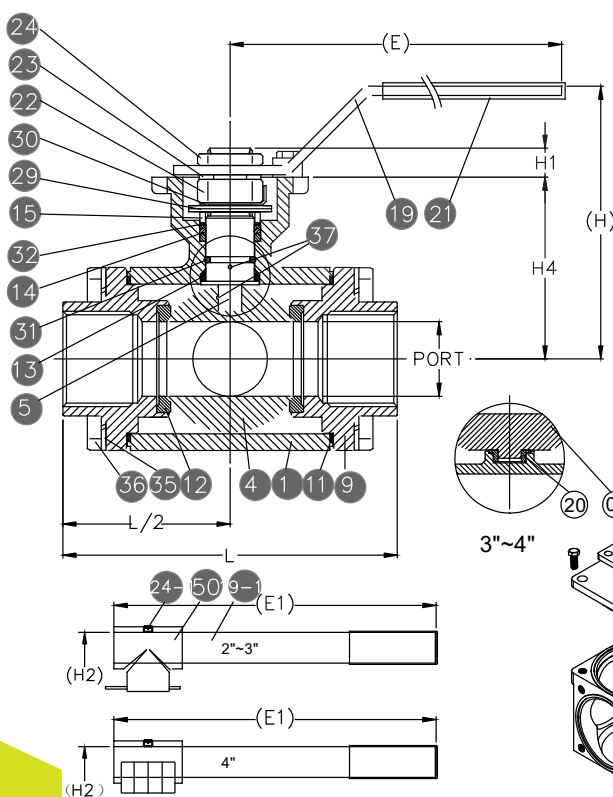
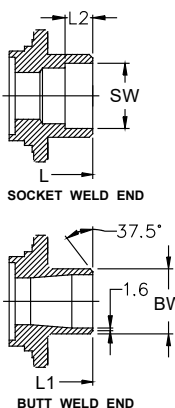




MODEL: BT-L(T)(X)BH 三/四通牙口全流量球塞閥

3-Way/4-Way Full Port Screwed Ends Ball Valve 1000PSI, ISO 5211 Direct Mounting Pad

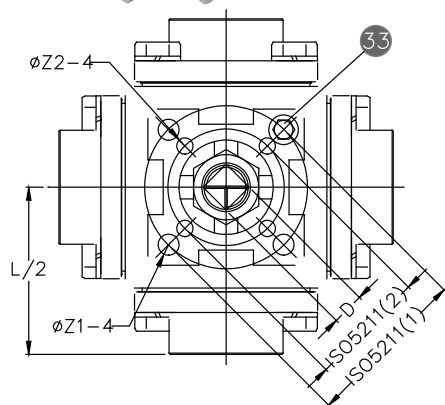

FEATURES :

1. BODY AND END CAPS QUALITY INVESTMENT CASTING
2. ADJUSTABLE STEM PACKING
3. BLOW-OUT-PROOF STEM DESIGN
4. AVAILABLE IN CARBON OR STAINLESS STEEL BODY
5. FLOATING BALL
6. LOCKING LEVER HANDLE AVAILABLE
7. CONNECTION END: THREAD END, BUTT WELD END, SOCKET WELD END
8. L PORT OR T PORT OR X PORT

MATERIAL LIST :

NO.	PART NAME	MATERIAL
1	BODY	ASTM A351 Gr.CF8M
4	BALL	ASTM A351 Gr.CF8M
5	STEM	SS316
9	END CAP	ASTM A351 Gr.CF8M
9-1	TOP CAP	ASTM A351 Gr.CF8M
11	BODY SEAL	PTFE.
11-1	TOP SEAL	PTFE.
12	SEAT	RTFE
13	THRUST WASHER	RTFE
14	STEM PACKING	RTFE
15	GLAND	SS304
19	HANDLE	SS304
19-1	HANDLE	SS304
20	BUSHING	PTFE.
21	HANDLE COVER	PLASTIC
22	STEM NUT	SS304
23	HANDLE WASHER	SS304
24	HANDLE NUT	SS304
24-1	HANDLE NUT	SS304
29	BELLEVILLE WASHER	SUS301
30	STOP WASHER	SS304
31	O-RING	VITON
32	PACKING FOLLOWER	PTFE. +25%GF
33	STOP PIN	SS304
35	BOLT	SS304
36	BOLT WASHER	SS304
36-1	BOLT WASHER	SS304
37	ANTI-STATIC DEVICE	SS316
50	HANDLE ADAPTER	CF8

BALL TYPE:

TURN	0°	90°	180°	270°
PORT				
L-BALL				
T-BALL				
X-BALL				

SIZE	PORT	L	L1	L2	E	E1	H	H1	H2	H4	D	Z1	Z2	ISO 5211	SW	BW
1/2"	16.0	96.0	96.0	10.0	186.5		89.0	9.0		47.8	9.0	6.0		42 F04	21.8	21.3
3/4"	20.0	107.0	113.0	13.0	218.0		98.0	11.0		58.2	11.0	7.0		50 F05	27.4	26.7
1"	25.0	126.0	130.0	13.0	218.0		102.0	11.5		64.0	11.0	7.0		50 F05	34.1	33.4
1-1/4"	32.0	133.0	133.0	13.0	235.0		118.5	15.2		79.0	14.0	9.0	7.0	50 F05	42.7	42.2
1-1/2"	38.0	151.0	160.0	13.0	235.0		127.0	14.3		88.5	14.0	9.0	7.0	50 F05	49.0	48.3
2"	50.0	166.0	168.8	16.0	251.5	400.0	154.8	17.8	161.4	105.8	17.0	11.0	9.0	70 F07	61.2	60.3
2-1/2"	65.0	175.0	194.0	16.0	301.5	400.0	166.2	17.5	172.8	117.3	17.0	11.0	9.0	70 F07	77.0	73.0
3"	76.0	210.0	231.2	16.0	301.5	400.0	173.8	17.5	180.4	128.0	17.0	11.0	9.0	70 F07	90.2	88.9
4"	100.0	285.6		22.0		600.0		30.0	204.0	159.0	27.0		14.0	125 F12	115.3	