




龍雲鑄造股份有限公司
Lung Yun Casting Co., Ltd
Phone : +886 426817600 Fax : +886426813474
20, Gong-3 Rd., Tachia Dist., Taichung City, Taiwan

台中市大甲區日南里工三路20號
E-mail: inquiry@lungyun.com.tw
http:// : www.lungyun.com

MODEL: BA-1AH

薄餅片式法蘭口球塞閥 Class 150

One-Piece Flange Ends Full Port Ball Valve
Class 150, ISO 5211 Directing Mounting Pad

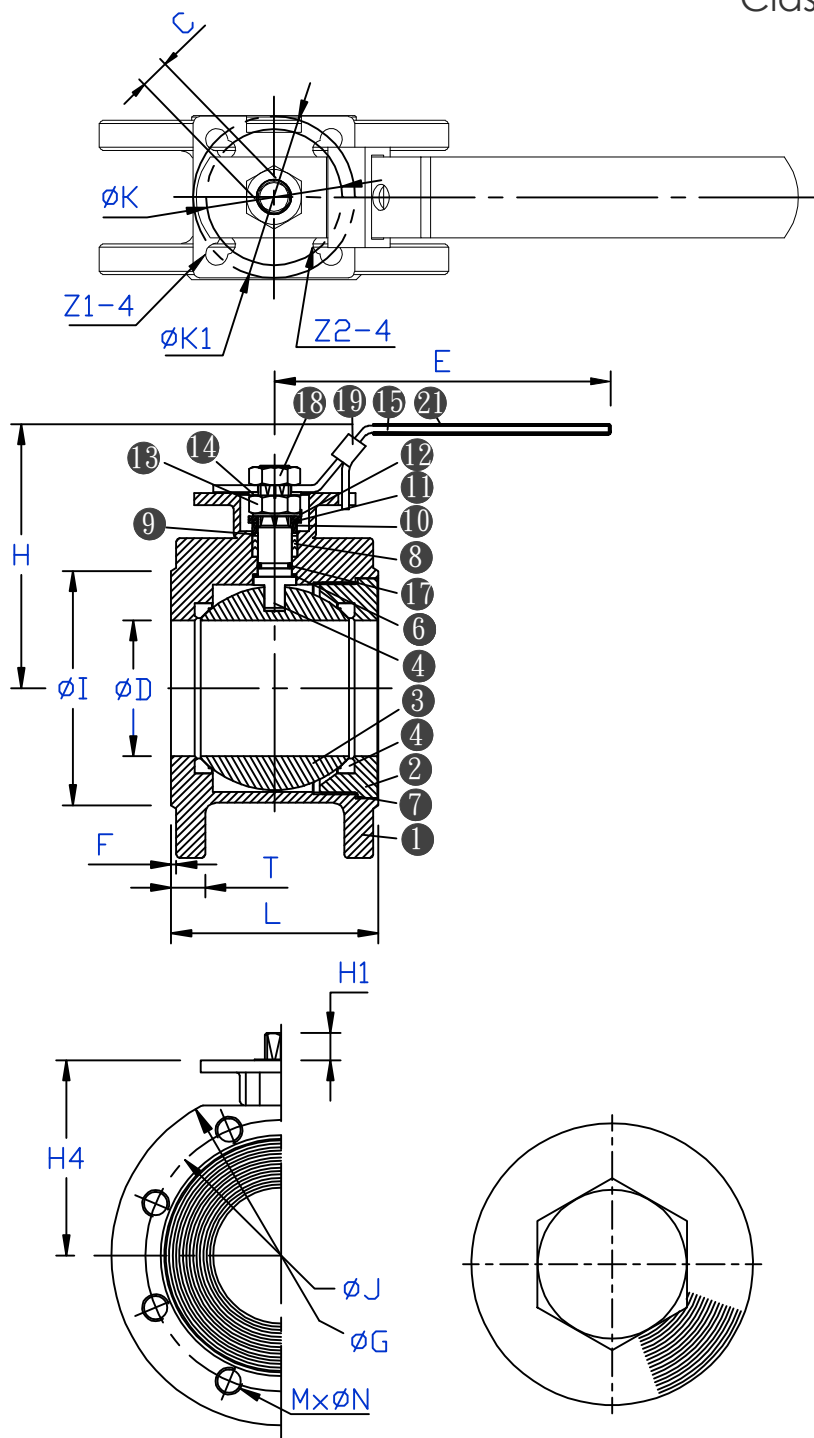

FEATURES:

1. Wafer Type
2. Connection: En1759-1 for size 1"~ 4"
3. Flange: Class 150
4. Full Port
5. ISO 5211 Direct Mounting Pad
6. Locking Lever Handle

MATERIAL LIST

NO.	DESCRIPTION	MATERIAL	
1	BODY	ASTM-A351-CF8M	ASTM-A216-WCB
2	CAP	ASTM-A351-CF8M	ASTM-A216-WCB
3	BALL	ASTM-A351-CF8M	ASTM-A351-CF8
4	SEAT	PTFE	PTFE
5	STEM	SUS 316	SUS 304
6	THRUST WASHER	PTFE	PTFE
7	JOINT GASKET	VITON	VITON
8	STEM PACKING	PTFE	PTFE
9	THRUST WASHER	PTFE 15%	PTFE 15%
10	GLAND BUSH	SUS 304	SUS 304
11	BELLEVILLE WASHER	SUS 301	SUS 301
12	STOP WASHER	SUS 304	SUS 304
13	STEM NUT	SUS 304	SUS 304
14	SQUARE WASHER	SUS 304	SUS 304
15	HANDLE	SUS 304	SUS 304
16	HANDLE COVER	PLASTIC	PLASTIC
17	O-RING OF STME	VITON	VITON
18	HANDLE NUT	SUS 304	SUS 304
19	LOCKING PAD	SUS 304	SUS 304

DIMENSIONS

UNIT:MM

SIZE		D	L	E	H	H1	H4	C	ØG	ØJ	ØI	T	F	MxØN	ØK	ØK1	Z1-4	Z2-4
DN15	½"	15	42	135	84.5	9	50.5	9	89	60.5	45			4x½"-13UNC	F04	F03	6	6
DN20	¾"	20	44	135	91	9	57	9	98	70	58			4x½"-13UNC	F04	F03	6	6
DN25	1"	25	51	150	96	9	62	9	108	79.5	51	11.2	1.6	4x½"-13UNC	F05	F04	7	6
DN32	1-1/4"	32	56	150	105.5	9	71.5	9	117	89	64	12.7	1.6	4x½"-13UNC	F05	F04	7	6
DN40	1-1/2"	38	65	200	120	11	86	11	127	98.5	73	14.3	1.6	4x½"-13UNC	F07	F05	9	7
DN50	2"	50	80	200	127	11	93	11	152	120.5	92	15.9	1.6	4x⅝"-11UNC	F07	F05	9	7
DN65	2-1/2"	65	102	248.5	140	14	105	14	178	139.5	105	17.5	1.6	4x⅝"-11UNC	F10	F07	11	9
DN80	3"	80	122	265.5	150	14	115	14	190	152.5	127	19	1.6	4x⅝"-11UNC	F10	F07	11	9
DN100	4"	100	153	335	167	17	132	17	229	190.5	157	23.8	1.6	8x⅝"-11UNC	F12	F10	13	11